



THE
ULTIMATE
CRUSHING
SOLUTION

Portable Horizontal Shaft Impact (HSI) Crusher

Sidewinder



Sidewinder


Portable Horizontal Shaft Impact (HSI) Crusher

CRUSHER



IROCK's Sidewinder reduces wear and increases production by screening out the sized material and crushing only oversized material. These secondary crushing plants come in three models and feature fast set-up, easy maintenance and extreme durability for a variety of crushing applications.

	SIDEWINDER-15	SIDEWINDER-20	SIDEWINDER-30
Engine	CAT® C9.3B 415 HP	CAT® C9.3B 415 HP	CAT® C13 536 HP
Screen Size	14 feet by 5 feet (3-deck screen)	16 feet by 6 feet (3-deck screen)	20 feet by 6 feet (3-deck screen)
Required HP	150 HP	200 HP	300 HP
Max Feed Size	8 inches	8 inches	10 inches
Rotor Size	40 inches x 43 inches	40 inches x 56 inches	52 inches x 56 inches
Weight	83,000 pounds	94,000 pounds	113,000 pounds

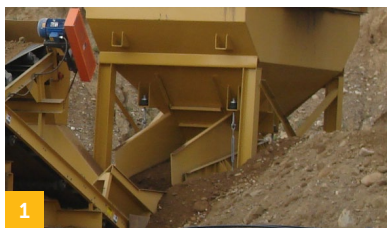

1 Set the pant leg chute to either return crushed material back to the crusher or discharge it as crushed product.



2 IROCK's four-bar rotor impactor design produces a consistent, uniform cubical product.



Closed-circuit design with a four-bar rotor impactor efficiently produces four products — three uniformly sized and one oversized. Oversized material can be returned to the crusher for further sizing. Crushing only oversized material limits wear cost and improves production.