



THE  
ULTIMATE  
CRUSHING  
SOLUTION


*Mobile Cone Crusher*

# ITC-200



# ITC-200 Mobile Cone Crusher

**CRUSHER**

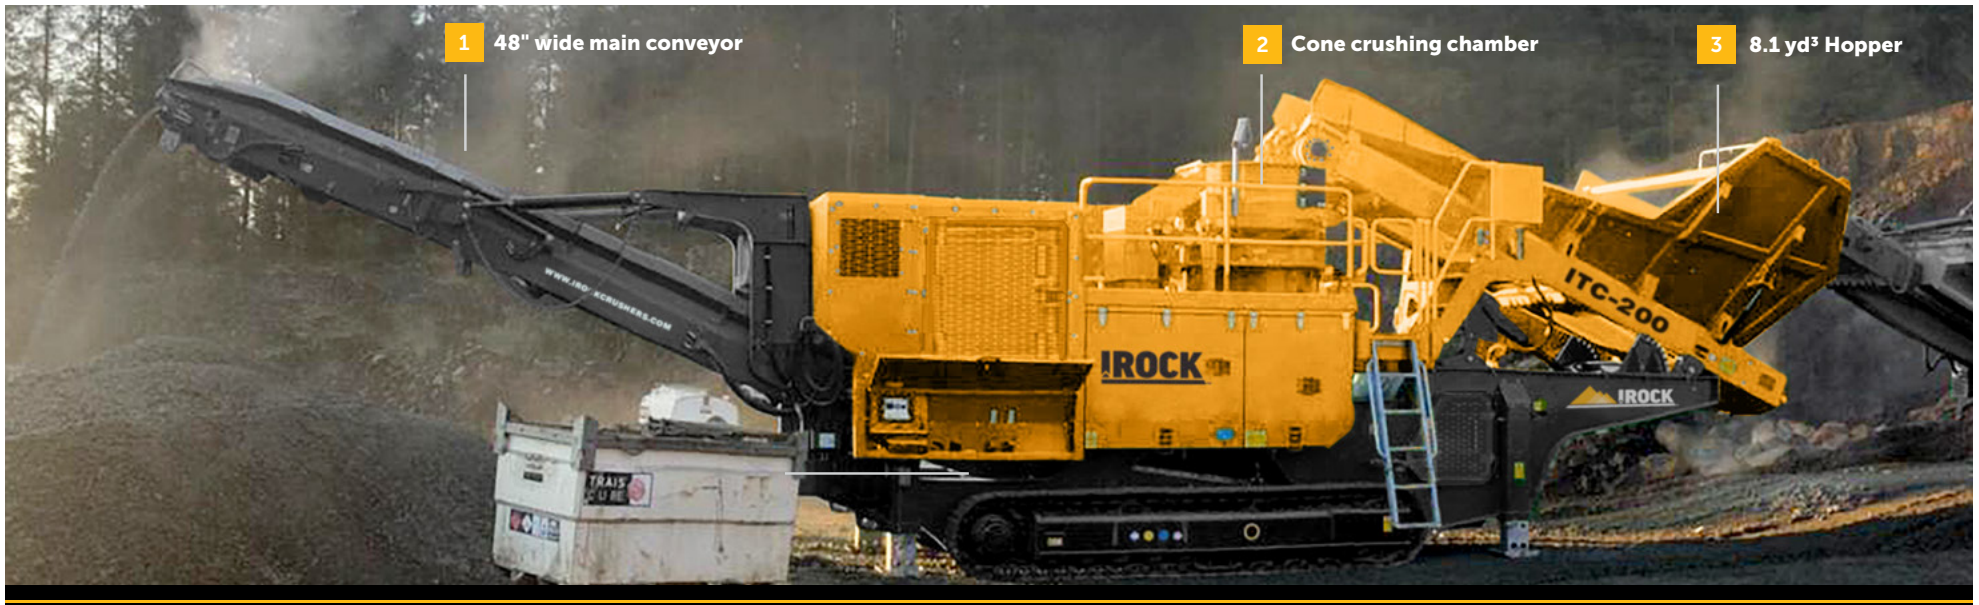

The IROCK ITC-200 Cone Crusher is designed for optimum versatility in crushing spreads, with easy conversion from the finest to the coarsest cavity and adjustable speed to produce a higher percentage of on-spec product. Fewer crushing stages lowers cost and saves energy with this ideal mobile secondary crushing solution for operators. The IROCK ITC-200 features an antispin system, load and material level monitoring, fully hydraulic push button Closed Side Setting (CSS) adjust and full hydraulic relief system.

Engine	CAT® C9.3B 350 HP
Feed Opening	38" (914 mm)
Feeder Belt Width	42" (1050 mm)
Hopper Volume	8.1 yd <sup>3</sup> (6.2m <sup>3</sup> )
Crusher Drive	Direct Drive
CSS Adjustment	Hydraulic
Transport Height	11' - 1.8" (3.4 m)
Transport Length	54' - 4.7" (16.6 m)
Transport Width	9' - 1.4" (2.80 m)
Weight	103,617 lb (47,000 kg) (est.)
Stockpile Height - Main Conveyor	14' - 0.5" (4281 mm)
Main Conveyor Belt Width	48" (1200 mm)



**1**  
Large gap between crusher discharge and the main conveyor feedfoot prevents bottlenecks.



**2**  
Built to be reliable in the toughest operating conditions, the cone produces 3/8" to a 1 1/2" product.



**3**  
Steel hopper with adjustable feed rate via control panel, remote control or fully automatic regulation with feedback from the cone.



Reversible magnet enables material separation from the source material.