



THE
ULTIMATE
CRUSHING
SOLUTION

Mobile Cone Crusher

ITC-200CC



ITC-200CC

Mobile Cone Crusher

CRUSHER




The IROC ITC-200CC recirculating cone crusher combines the productivity of the 38" cone with the versatility of a full screening and recirculating system. The ITC-200CC is an entry-level cone with full level features like an anti-spin system, load and material level monitoring, fully hydraulic push button CSS adjust and full hydraulic relief system. This system allows operators to produce a high quality crushed and screened final product with one machine. The 5' x 10' High Energy Screenbox allows greater control over the final product.

Engine	CAT® C9.3B 350 HP
Feed Opening	38" (914 mm)
Feeder Belt Width	42" (1050 mm)
Hopper Volume	8.1 yd³ (6.2m³)
Crusher Drive	Direct Drive
CSS Adjustment	Hydraulic
Transport Height	11' - 2" (3.4 m)
Transport Length	60' - 9" (18.52 m)
Transport Width	11' - 5" (3.49 m)
Weight	114,640 lb (52,000kg) (est.)
Stockpile Height - Main Conveyor	13' - 10.8" (4281 mm)
Main Conveyor Belt Width	48" (1200 mm)



1 Steel hopper with adjustable feed rate via control panel, remote control or fully automatic regulation with feedback from the cone.

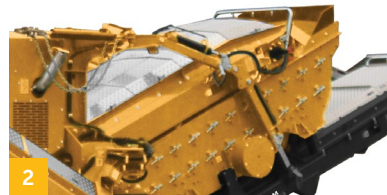

2 5' x 10' High Energy Screenbox has a user-friendly wedge system for faster screen change.



3 Recirculation conveyor allows operators to produce a crushed and screened final product with one machine.



Reversible magnet enables material separation from the source material.